PAR
TAPS



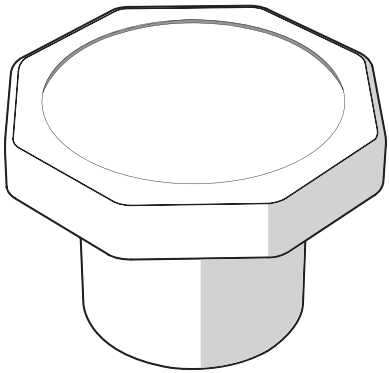

Button Decal Replacement

Installation Guide

Ver 26.1

Important Information

Prior to Installation:

- Please follow the instructions to replace the “hot” and “cold” decal on your button.
- Avoid wetting your decal for the first 24 hours

---

1. Firstly remove the old decal from the button.

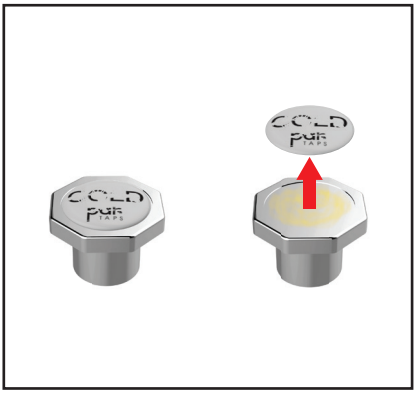

2. Clean the surface area with Methylated Spirits and allow 5 mins to dry.



3. Carefully remove decal off backing sheet. Apply the decal to the button and hold there for approx. 1 min with firm pressure.

