


Shower Hardware Collection

Installation Guide



P A R
TAPS

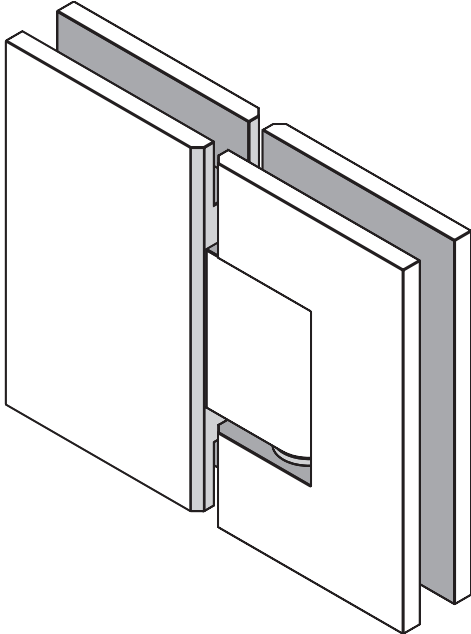

www.partaps.com




[/ParTapsPtyLtd](https://www.facebook.com/ParTapsPtyLtd)



[@par_taps](https://www.instagram.com/par_taps)

Universal Shower Hinge - 180°




Max. door weight
35kg


Max. door width
800mm

Suitable for 10mm thick glass


Glass Cut-Out Details

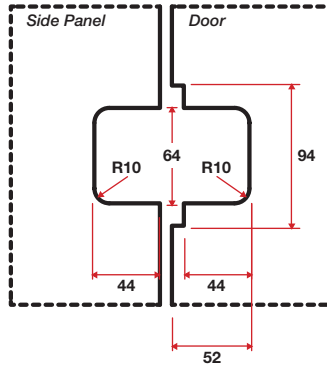

Insitu Application



Universal Shower Hinge - 90°




Max. door weight
35kg


Max. door width
800mm

Suitable for 10mm thick glass


Glass Cut-Out Details



Insitu Application



Universal Shower Hinge - 90° Wall to Glass




Max. door weight
35kg


Max. door width
800mm

Suitable for 10mm thick glass
Stud fixing is recommended for all glass to wall applications


Glass Cut-Out Details



Insitu Application




**Universal Shower Handle
Round Dual Handle**




Suitable for 10mm thick glass


Glass Cut-Out Details



Insitu Application



**Universal Shower Bracket - 90°
Wall to Glass**




Suitable for 10mm thick glass

Stud fixing is recommended for all glass to wall applications

Ensure a 5mm gap between the wall and the door

Glass Cut-Out Details

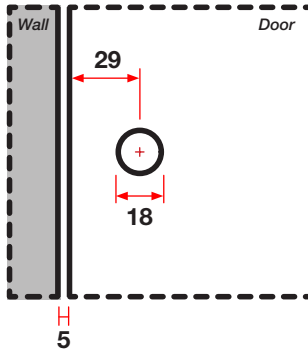



P A R
TAPS